

WS Split Steel Wall Sleeves

WS Split Wall Sleeves are constructed from steel and are available in a wide range of diameters. They are an excellent choice for installations where the application has an existing pipe and requires a sealing penetration.


A = 12"

B = 3"

C = 6"

D = 3"

E = 1/8"

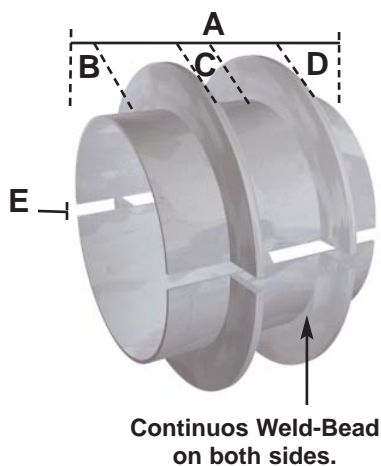

Model WS Split Sleeves (12" length)

MODEL	I.D.
WS-2-15-S-12DWS	2.07
WS-2-1/2-27-S-12DWS	2.47
WS-3-21-S-12DWS	3.07
WS-3-1/2-22-S-12DWS	3.55
WS-4-23-S-12DWS	4.03
WS-5-25-S-12DWS	5.05
WS-6-28-S-12DWS	6.07
WS-8-32-S-12DWS	7.98
WS-10-36-S-12DWS	10.02
WS-12-37-S-12DWS	12.00
WS-14-37-S-12DWS	13.25
WS-16-37-S-12DWS	15.25
WS-18-37-S-12DWS	17.25
WS-20-37-S-12DWS	19.25
WS-22-37-S-12DWS	21.25
WS-24-37-S-12DWS	23.25
WS-26-37-S-12DWS	25.25
WS-28-37-S-12DWS	27.25
WS-30-37-S-12DWS	29.25

WS Split Steel Wall Sleeve - Specification

Provide WS Split Steel sleeves for all pipes passing through existing concrete or masonry structures. WS Split Steel sleeve sizes shall be provided free of welding slag. The sleeve shall be furnished with two - (2") water-stop collars of the same material as the WS split sleeve. The collar collars shall be welded all around on both sides to the sleeve. WS Split Steel Sleeve sizes through 10" shall be Schedule 40 Steel Pipe or standard wall thickness. WS Split Steel Sleeve sizes 12" and larger shall have a .375" or standard wall thickness.

The WS Split Steel Sleeve shall be primed inside and outside with Rust-o-Leum red primer #5268 or approved equivalent.

Pipeline Seal and Insulator, Inc., Houston, Texas, U.S.A shall provide WS Split Steel Sleeves.

WS Split Steel Wall Sleeve - Important Notes

Made to order - may not be returned or exchanged.

Model WS Split Sleeves furnished Galvanized shall be galvanized after all welding, cutting, and cleaning has been completed.

E Measurement must always be 1/8" for welding purposes.

Model Number - **DWS** = Double Water-Stop Split Sleeve.



Pipeline Seal and Insulator, Inc.

6525 Goforth Street, Houston, TX 77021 U.S.A.
 Telephone: 713-747-6948, Facsimile: 713-747-6029
 Toll Free: 800-423-2410
 e-mail: info@psipsi.com
 www.linkseal.com, www.pipeline seal.com